



RIVA RACING

PERFORMANCE PRODUCTS & ACCESSORIES

Rail Molding Kit **PART# - RHS5-RMK-040**

APPLICATION(S): Hydrospace S4

- INSTALLATION INSTRUCTIONS -

1. 7/8" above the bond flange apply masking tape around the entire length of the craft including the section at the rear between the sponsons. (see illustration #1 & 2)
2. Scuff, do not gouge, the bond flange using a Scotch Brite pad or 220 grit sand paper. Remove tape.
3. Clean scuffed areas using a non-residual cleaner.
4. Starting at one end of the longer rail molding peel back 2" of adhesive backing. At the rear of the craft apply only those 2" to the matching side. **NOTE:** Make sure the bottom edge is not below bond flange. (see illustration #3)
5. Without removing the remaining adhesive backing test fit the rail molding all the way around the craft. **NOTE:** Due to temperature variances the rail molding may be longer or shorter than what is required. If molding is longer simply remove adhesive backing in short sections and apply rail molding to bond flange all the way around craft. Trim excess with a sharp razor to match angle of bond flange at end. If material is too short simply stretch it to fit. We recommend using a hair dryer to warm the rail molding as you go. **NOTE: DO NOT OVERHEAT. You should be able to handle with your bare hands without discomfort.**
6. At rear of craft apply shorter rail molding. (see illustration #4) Trim as needed.
7. After installing rail molding firmly press against bond flange all the way around craft several times.

Remember, the water belongs to everyone. Please ride responsibly!

Technical Support

For answers to questions regarding installation or trouble shooting RIVA Performance Products contact:
RIVA Technical Support directly at (954) 247-0705 or by e-mail at tech_support@rivamotorsports.com.

Limited Warranty

RIVA Rail Molding Kits carry a 30-day limited warranty to the original purchaser. They are warranted to be free of defects in materials and workmanship under normal use and service. Customer modified components outside the steps outlined in these instructions will be void of warranty. This warranty is limited to defects in the primary components only. Finish and/or wear marks in or on primary components are not covered under this warranty.

RIVA Racing's liability is expressly limited to the repair or replacement of the components contained within or associated with this kit. RIVA Racing agrees to repair or at RIVA's option, replace any defective unit without charge, if product is returned to RIVA Racing freight prepaid within the warranty period. Any equipment returned which, in RIVA's opinion, has been subjected to misuse, abuse, overheating or accident shall not be covered by this warranty.

RIVA Racing shall have no liability for special, incidental or consequential damages or injury to persons or property from any cause arising from the sale, installation or use of this product.

No other warranty, express or implied, including, but not limited to the implied warranties of merchantability and fitness for a particular purpose, applies. Various states do not allow for the limitation of incidental or consequential damages and therefore the above exclusion or limitation may not apply to you.

Warranty does not include the expenses related to freight or transportation of parts or compensation for any inconvenience or loss of use while being repaired. A copy of the original invoice and a Return Authorization Number (RA#) must accompany all warranty claims.

Warranted replacement parts will be returned freight collect.

- INSTALLATION IMAGES -

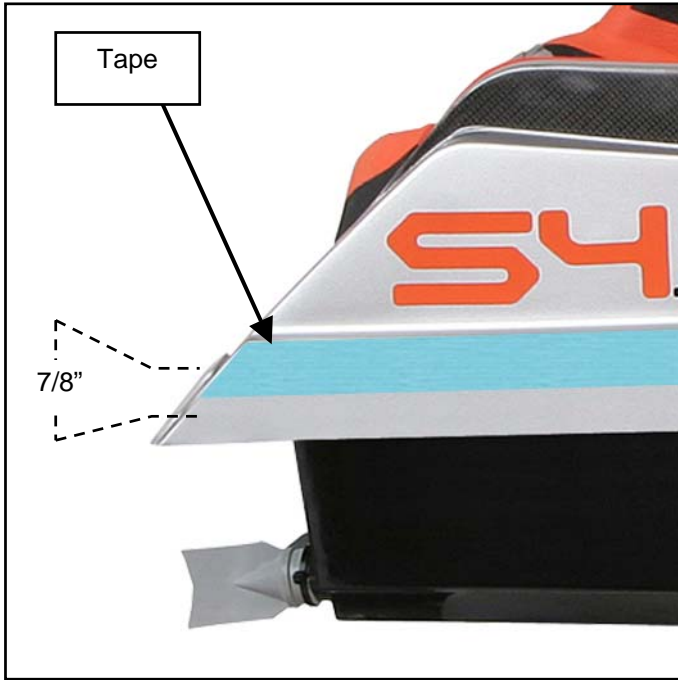


Illustration #1



Illustration #3



Illustration #4